




P1 SERIES


DIMENSIONS (Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.)

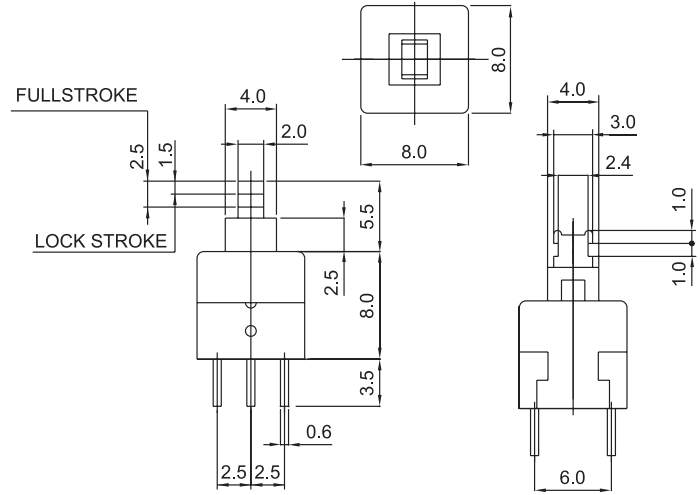

SPECIFICATIONS

Insulation Resistance (at 500VDC/minute).....Min. 100MΩ
 Storage Temperature Range.....-25°C to 65°C
 Storage Humidity.....at 40°C, Max. 85% R.H
 Electrical Service Life..... Min.10,000 operations
 Electrical Operating Frequency.....10 operations per minute.
 Mechanical Service Life..... Min. 100,000 operations
 Mechanical Operating Frequency.....30 operations per minute
 Travel.....Pre travel Max.1.5mm, Total travel 2.5±0.5mm

CONTACT CONFIGURATION

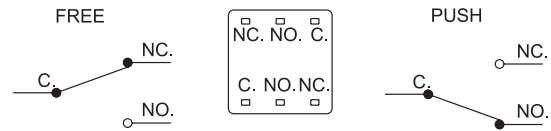

OPERATING FORCE

	NON LOCK	LOCK
L	90±30gf	130±50gf
S	150±50gf	180±50gf


RATING

0.1A 30 VDC

APPLICATION

Telephone, Computer, Tester

TOP BUTTON DIMENSIONS

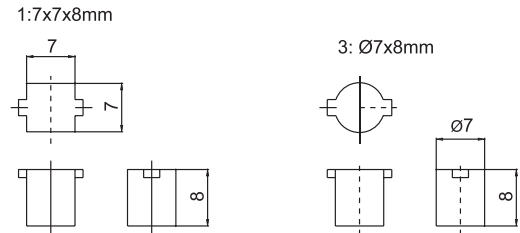

ORDERING INFORMATION

